

PORTABLE SURFACE ROUGHNESS TESTER SURFTEST SJ-201/301

Bulletin No. 1812



**Excellent, Portable Surface Roughness Testing
with Enhanced Capabilities**

Mitutoyo

World-Class Portable Surface Roughness Testers

Battery-powered portability means better productivity when making surface roughness measurements on the shop floor.

Capable of performing measurements in any orientation, including vertical and upside-down. Optional accessories, such as a height gage adapter, allow measurements to be performed easily in various situations and setups.



Improved Product Lineup

A wide variety of system setups is possible with the detector + drive unit + display unit combination.

Standard detector

Measuring force: 0.75mN
Stylus profile: Tip radius: 2 μ m

Measuring force: 4mN
Stylus profile: Tip radius: 5 μ m



Drive units

Standard drive unit

For SJ-201P/SJ-301

- Popular standard drive unit



Transverse tracing drive unit

For SJ-201S/SJ-301S

- Best suited for measurement of narrow, shrouded workpiece features such as crankshaft bearings, etc.



Retractable drive unit

For SJ-201R/SJ-301R

- The detector is in the retracted position at rest so it is immune from damage when inserted into a feature whose profile cannot easily be seen, such as a blind hole, etc.



Display units

Handheld compact unit

Display unit for SJ-201 series

- For SJ-201P/201S: Standard type
- For SJ-201R: With function to retract the detector when setting up



Touch-panel operation unit with a built-in printer

SJ-301 series display unit

- For SJ-201P/201S: Standard type
- Common to SJ-301/301S/301R



Surftest SJ-301 Series

Unbeatable portable surface roughness tester created for ease-of-use and as a cost-effective solution to a wide variety of measuring needs




Simple operations performed with the large LCD touch-panel

- The Measure-Start button and others frequently used are shop-hardened and resistant to workshop contaminants.



Equipped with a large capacity battery that, when fully charged, allows approximately 600 measurements to be made

- A convenient carrying case is supplied as standard for protecting the instrument in the field.

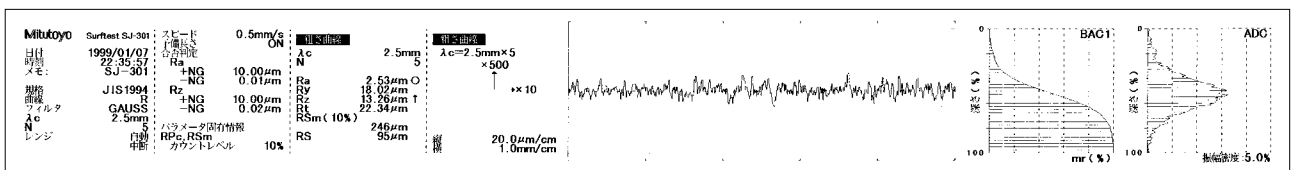


A high-resolution, high-speed printer is built in the main unit.


- Five sets of measurement set-ups can be saved in the unit and the optional memory card (compact flash memory) allows saving of set-ups and measurements.
- Measurement data also can be saved in the memory card in CSV format and then loaded onto a personal computer for data handling with spreadsheet software.

Mitutoyo


Result display screen shows the GO/NG judgment result.

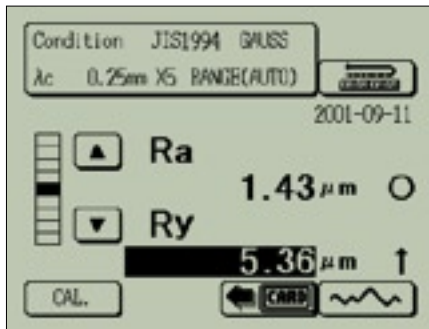


Recorded profile display capability allows surface texture measurements to be checked instantly, prior to print-out.

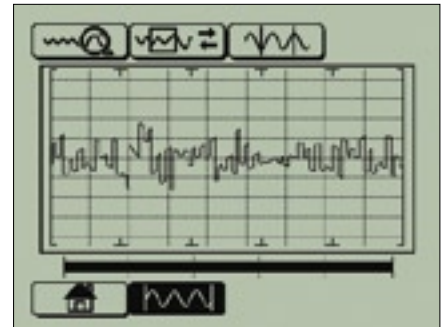


Evaluation parameters conform to internationally recognized surface roughness standards.

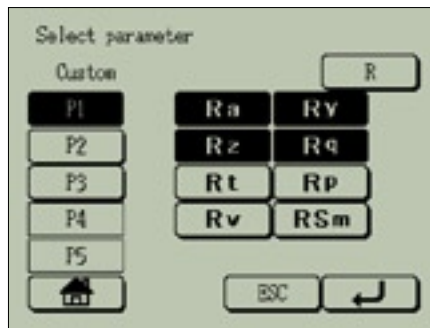

With a broad array of statistical processing functions, the instrument is ideally suited for histogram-based data management.

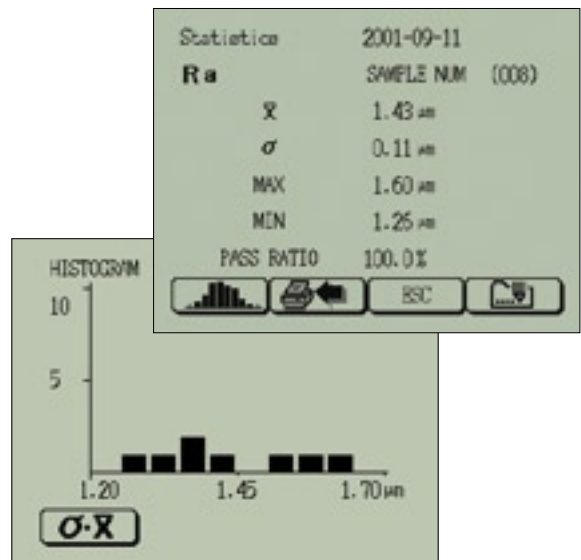

The data deletion function allows on-screen elimination of flaws that should be excluded from calculation prior to performing an evaluation.

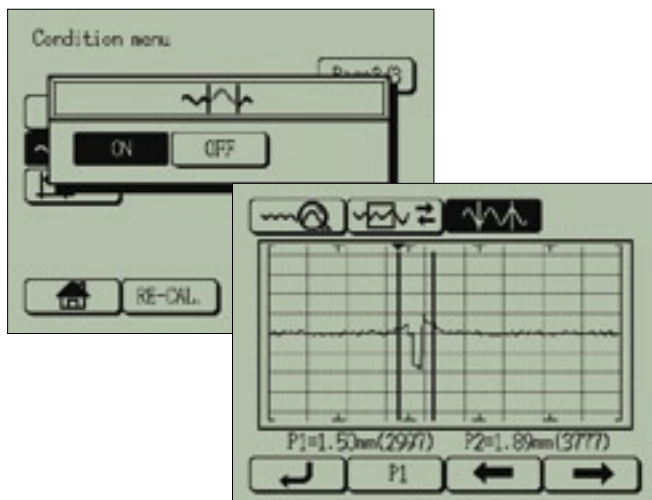


Surftest SJ-301 Series

External view

Unit: Inch (metric)

Drive unit type	Drive unit external view
Standard drive unit	
Retractable drive unit	
Transverse tracing drive unit	

- Display unit external view

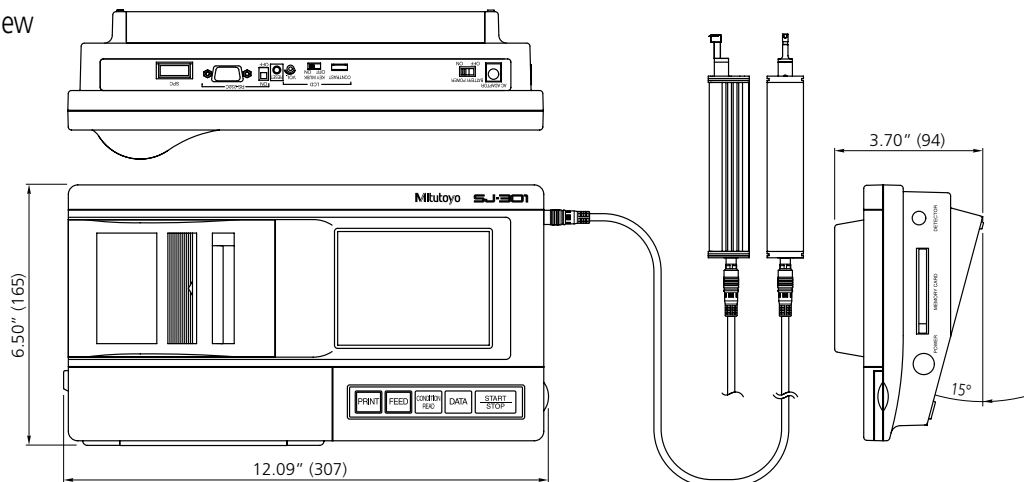

Mitutoyo

Specifications

Unit: Inch (metric)

Model No.	SJ-301		SJ-301R		SJ-301S		
	4mN type	0.75mN type	4mN type	0.75mN type	4mN type	0.75mN type	
Order No.	178-953-3 (mm)	178-952-3 (mm)	178-980 (mm)	178-990 (mm)	178-929-2 (mm)	178-939-2 (mm)	
	178-954-3 (inch/mm)	178-955-3 (inch/mm)	178-987 (inch/mm)	178-997 (inch/mm)	178-901-2 (inch/mm)	178-902-2 (inch/mm)	
Measuring range	X-axis	.5 inch (12.5mm)				.22 inch (5.6mm)	
	Z-axis	13780µinch (-7880µinch to +5900µinch) (350µm (-200µm~ +150µm))					
Drive unit	Measuring speed	.01, .02 inch/s (0.25, 0.5mm/s)				.01 inch/s (0.25mm/s)	
	Measuring motion	Standard		Starts measuring from detector retracted state		Transverse tracing	
Detector	Conical-taper angle	90°	90°	90°	60°	90°	90°
	Stylus tip radius	5µm	2µm	5µm	2µm	5µm	2µm
	Measuring force	4mN	0.75mN	4mN	0.75mN	4mN	0.75mN
	Stylus tip material	Diamond					
	Skid radius of curvature	1.57 inch (40mm)					
	Skid force	400mN or less					
	Detecting method	Differential inductance					
	Applicable standards	JIS'82, JIS'94, JIS'01, DIN, ISO, ANSI					
Assessed profiles	Primary profile (P), Roughness profile (R), DIN4776, MOTIF-R, MOTIF-W						
Parameters	Ra, Ry, Rz, Rt, Rp, Rq, Rv, Sm, S, Pc, R3z, mr (c), Rpk, Rvk, δc, Rk, Mr1, Mr2, Lo, Ppj, R, AR, Rx, A1, A2, Vo, HSC, mr, SK, Ku, Δa, Δq, Wte, Wx, W, AW (can be customized)						
Sampling length	.003, .01, .03, .1, .3 inch (0.08, 0.25, 0.8, 2.5, 8mm)						
Number of sampling lengths	x1, x3, x5						
Arbitrary length	.01 to .49 inch (.01 inch interval) (0.3 ~ 12.5mm (0.1 mm increment))						
Cutoff filter	2CR / PC75 / Gaussian						
Cutoff length	λc	.003, .01, .03, .1, .3 inch (0.08, 0.25, 0.8, 2.5, 8mm)					
	λs	100µinch, 320µinch, 1000µinch (2.5, 8, 25µm)					
Printer	Built-in thermal printer						
Graphical printout	Bearing are curve (BAC1 BAC2), Amplitude distribution curve (ADC)						
Printing width	1.89" (48mm) (Paper width: 2.28" (58 mm))						
Recording magnification	Vertical magnification	x10, x20, x50, x100, x200, x500, x1K, x2K, x5K, x10K, x20K, x50K, x100K, AUTO					
	Horizontal magnification	x1, x2, x5, x10, x20, x50, x100, x200, x500, x1K, AUTO					
Function	Customization	Desired parameters can be selected for calculation and display.					
	Statistical processing	Maximum value, minimum value, mean value, standard deviation, pass rate, frequency distribution chart of each parameter					
	GO/NG judgment	Upper/lower limits setting: 3 parameters, GO/NG judgment rule: mean value, 16% rule, maximum value rule					
	Measurement conditions saving	Maximum 5 sets					
	Data saving	Save/retrieval of measurement conditions (up to 20 sets), evaluation data, sampling data, and statistical data with a memory card (option).					
	Calibration	Auto-calibration with the entry of numerical value.					
Power saving function	If the auto-power-off function ON: Power turns off if not operated for 5 minutes						
External input/output	RS-232C I/F, SPC output						
Power supply	Two-way power supply: battery (rechargeable Ni-H battery) and AC adapter.						
Battery	Charging time	15 hours maximum					
	Recharge cycles	Approximately 600 times (slightly varies with the usage and environmental conditions)					
External dimensions (WxDxH)	Display unit	12.09"x6.50"x3.70" (307x165x94mm)					
	Drive unit	4.53"x.91"x1.02" (115x23x26mm)					
Mass	Display unit	2.65 lbs. (1.2kg)					
	Drive unit	.44 lbs. (0.2kg)					
LCD dimensions	3.94"x2.76" (100x70mm), Touch-panel type						
Standard accessories	12BAA686	Connecting cable			12BAA686	Connecting cable	
	178-601 (mm) / 178-602 (inch/mm)	Roughness specimen (Ra3µm)			178-605 (mm) / 178-606 (inch/mm)	Roughness specimen (Ra1µm)	
	357651	AC adapter			357651	AC adapter	
	12AAA217	Flat surface nosepiece			12AAE643	Point-contact adapter	
	12AAA218	Cylinder nosepiece			12AAE644	V-type adapter	
	12AAA216	Supporting feet set			353134	Calibration stage	
	12BAA689	Touch-pen			12BAA689	Touch-pen	
	12BAA690	Protector sheet			12BAA690	Protector sheet	
	541106	Flat-blade screwdriver			541106	Flat-blade screwdriver	
	270732	Printer paper (5 rolls)			270732	Printer paper (5 rolls)	
12BAA781	Carrying case			12BAA781	Carrying case		

To denote your AC line voltage add the following suffixes (e.g. 178-953-3A). A for 120V, C for 110V (for Taiwan), D for 220V, E for 240V, K for 220V (for Korea), DC for 220V (for China)

Optional accessories, consumables, and others for SJ-301

- Printer paper (5 rolls)
- Durable printer paper (5 rolls)
- Touch-panel protector sheet (10 sheets)
- Memory card (64MB) *1

- No.**270732**
- No.**12AAA876**
- No.**12AAA896**
- No.**12AAD068** *1: Compact flash (CF) card on the market is also available.

Surftest SJ-201 Series

Light-weight, compact and simple to operate!



The display unit has IP53 protection level against dripping water and dust.



The built-in battery if fully charged allows approximately 500 measurements to be taken even on a site with no access to power. A convenient carrying case is supplied as standard for protecting the instrument in the field.

Up to 10 measurement results can be saved in the built-in memory.

Mitutoyo

Measurement results appear in large characters on the large LCD screen. Results can be confirmed at a glance.




Detailed set-ups, such as change of standards and cutoff lengths, can be made by pressing the relevant buttons after sliding back the top cover.



The SPC connector for Digimatic output and the RS-232C output connector are provided on the rear panel of the display unit for data output to external devices.



Printout of recorded profiles is also possible if the tester is connected to the dedicated hand-held, built-in battery operated compact SJ-printer (optional).

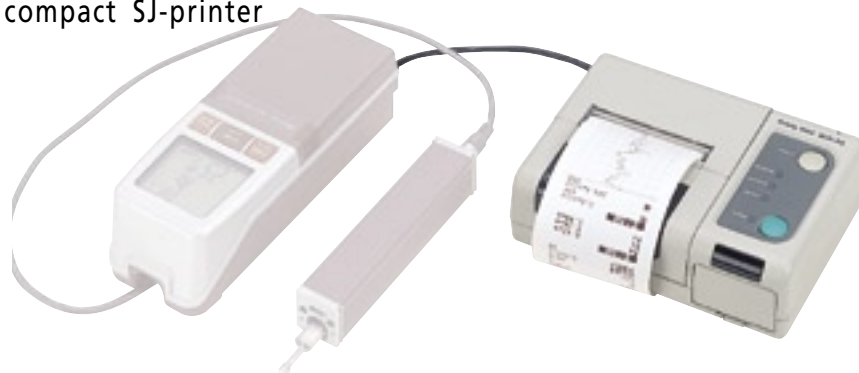


Surftest SJ-201 Series

External view

Unit: Inch (Metric)

- Display unit external view

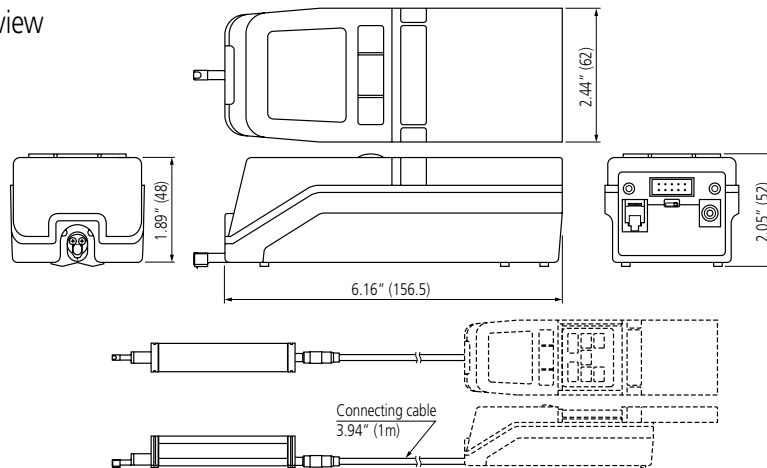

Type of drive unit	Drive unit external view
Standard drive unit	
Retractable drive unit	
Transverse tracing drive unit	

Specifications

Unit: Inch (Metric)

Model No.	SJ-201P		SJ-201R		SJ-201S	
	4mN type	0.75mN type	4mN type	0.75mN type	4mN type	0.75mN type
Order No.	178-920-2 (mm)	178-930-2 (mm)	178-985 (mm)	178-995 (mm)	178-889-2 (mm)	178-899-2 (mm)
	178-923-2 (inch)	178-933-2 (inch)	178-986 (inch)	178-996 (inch)	178-912-2 (inch)	178-913-2 (inch)
Measuring range	X-axis	.5 inch (12.5mm)			.22 inch (5.6mm)	
	Z-axis	13780µinch (-7880µinch to +5900µinch) (350µm (-200µm~ +150µm))				
Drive unit	Measuring speed	.01, .02 inch/s (0.25, 0.5mm/s)			.01 inch/s (0.25mm/s)	
Detector	Measuring motion	Standard		Starts measuring from detector retracted state		Transverse tracing
	Conical taper angle	90°	90°	90°	60°	90° 90°
	Stylus tip radius	5µm	2µm	5µm	2µm	5µm 2µm
	Measuring force	4mN	0.75mN	4mN	0.75mN	4mN 0.75mN
	Stylus tip material	Diamond				
	Skid radius of curvature	1.57 inch (40mm)				
	Skid force	400mN or less				
	Detecting method	Differential inductance				
Applicable standards	JIS'82, JIS'94, JIS'01, DIN, ISO, ANSI					
Assessed profiles	Primary profile (P), roughness profile (R), DIN4776 profile					
Evaluation parameters	Ra, Ry, Rz, Rq, S, Sm, Pc, R3z, mr (c), Rt, Rp, Rk, Rpk, Rvk, Mr1, Mr2, A1, A2, Vo (can be customized)					
Sampling length	.01, .03, .1 inch (0.25, 0.8, 2.5mm)					
Number of sampling lengths	x1, x3, x5					
Arbitrary length	.01 to .49 inch (.01 inch interval) (0.3 ~ 12.5mm (0.1mm increment))					
Digital filter	2CR / PC75 / Gaussian					
Cutoff length	λc	.01, .03, .1 inch (0.25, 0.8, 2.5mm)				
	λs	100µinch, 320µinch (2.5, 8µm)				
Printer	Optional (Refer to page 14)					
Functions	Customization	Desired parameters can be selected for calculation and display.				
	Statistical processing	-				
	GO/NG judgment	Upper / lower limit setting: 2 parameters, GO/NG judgment rule: mean value ^{*1}				
	Measurement conditions saving	Saves the conditions at the power OFF				
	Data saving	A maximum of 10 measurement results can be saved.				
	Calibration	Auto-calibration with the entry of numerical value				
Power saving function	If the auto-power-off function is ON then power turns off if no operation for 30 seconds.					
External input/output	RS-232C I/F, SPC output, printer output					
Power supply	Two-way power supply: battery (rechargeable Ni-H battery) and AC adapter.					
Battery	Charging time	12 hours (16 hours maximum)				
	Recharge cycles	Approximately 500 times (slightly varies according to usage and environmental conditions)				
External dimensions (WxDxH)	Display unit	6.16"x2.44"x2.05" (156.5x62x52mm)				
	Drive unit	4.53"x.91"x1.02" (115x23x26mm)				
Mass	Display unit	.66 lbs. (0.3kg)				
	Drive unit	.44 lbs. (0.2kg)				
LCD dimensions	1.57"x1.38" (40x35mm), Large character display					
Standard accessories	12BAA303	Connecting cable			12BAA303	Connecting cable
	178-601 (mm) / 178-602 (mm/inch)	Roughness specimen (Ra3µm)			178-605 (mm) / 178-606 (mm/inch)	Roughness specimen (Ra1µm)
	353134	Calibration stage			12AAE643	Point-contact adapter
	538612	Phillips screwdriver			12AAE644	V-type adapter
	12BAA304	Carrying case			353134	Calibration stage
	526688	AC adapter			538612	Phillips screwdriver
					12BAA781	Carrying case
					526688	AC adapter

*1: Not compatible with the 16% rule and maximum value rule.

To denote your AC line voltage add the following suffixes (e.g. 178-920-2A). A for 120V, C for 110V (for Taiwan), D for 220V, E for 240V, K for 220V (for Korea), DC for 220V (for China)

Optional accessories

Drive unit, Display unit


Drive unit	Display unit	Model No.
Standard drive unit Order No. 178-230-2	Standard display unit Order No. 178-243-2	SJ-201P
Transverse tracing Order No. 178-233-2		SJ-201S
Detector retracting type Order No. 178-235	Dedicated display unit for the detector retracting type Order No. 178-250	SJ-201R

Drive unit	Display unit	Model No.
Standard drive unit Order No. 178-230-2	Order No. 178-241-3	SJ-301
Transverse tracing Order No. 178-233-2		SJ-301S
Detector retracting type Order No. 178-235		SJ-301R


Detector

Unit: Inch (Metric)


Standard detector




4mN type No. **178-390**
 0.75mN type No. **178-296**
 (Stylus tip radius 2 μ m, 60°)
 No. **178-395**
 (Stylus tip radius 2 μ m, 90°)
 Stylus tip radius 10 μ m type No. **178-391**




Extra-small hole detector




No. **178-393**
 Minimum measurable hole diameter:
 ϕ .11" (ϕ 2.8mm)

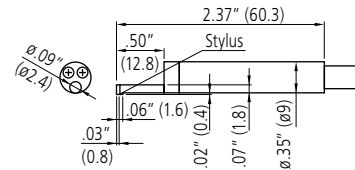


Small hole detector




No. **178-392**
 Minimum measurable hole diameter:
 ϕ .18" (ϕ 4.5mm)

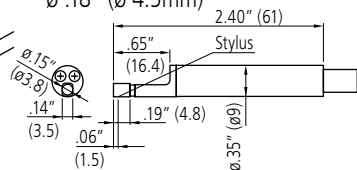

Deep groove detector



No. **178-394**
 Maximum accessible groove depth: .31" (8mm)
 * Not available for the transverse tracing drive unit.

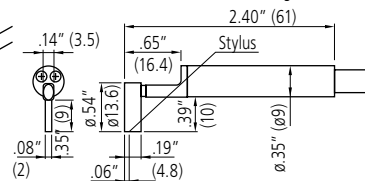

Optional accessories Drive unit accessories

Drive unit, Display unit

Nosepiece for flat surfaces

No.12AAA217

- * SJ-301 standard accessories
- * Not available for the transverse tracing drive unit.



Nosepiece for cylindrical surfaces

No.12AAA218


- * SJ-301 standard accessories
- * Not available for the transverse tracing drive unit.



V-type adapter

No.12AAE644


- * SJ-201S/301S standard accessories
- * Dedicated to the transverse tracing drive unit.

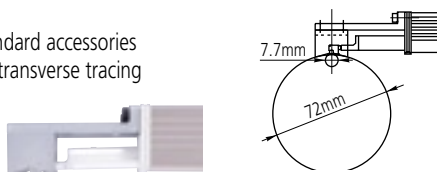

Point-contact adapter

No.12AAE643


- * SJ-201S/301S standard accessories
- * Dedicated to the transverse tracing drive unit.

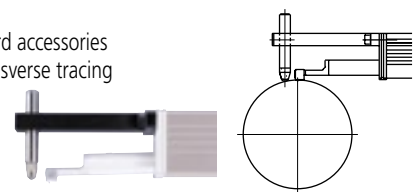

Extension rod 1.97" (50mm) (Note: Extension is possible with only a single rod.)

No.12AAA210

- * Not available for the transverse tracing drive unit.

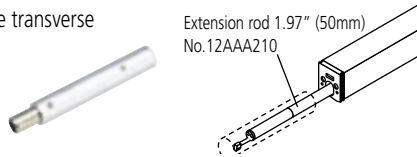

Extension cable 39.40" (1m) (Note: Extension is possible with only a single cable.)

No.12BAA303

Support feet set

No.12AAA216


- * SJ-301 standard accessory
- * Not attachable to the detector side of the transverse tracing drive unit.



Vertical positioning adapter


No.12AAA219

- * Not available for the transverse tracing drive unit

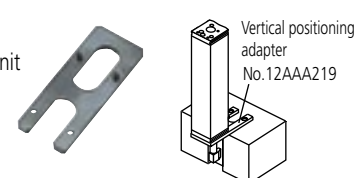


Magnetic stand adapter

No.12AAA221

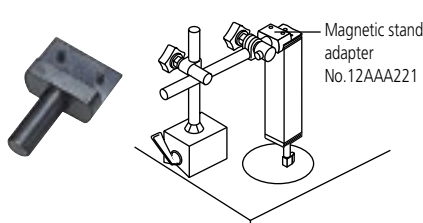

Height gage adapter

No.12AAA222

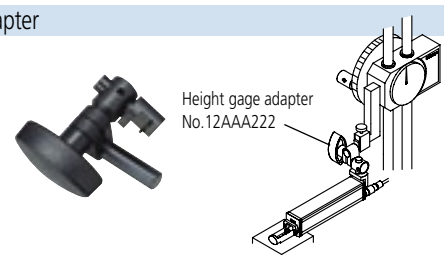

Setting attachments

* Not available for the transverse tracing drive unit

Enhances measurement efficiency by facilitating the measurement setup of multiple workpieces of the same type and of the hard-to-access sections of a workpiece.

Setting attachment: V type for measuring in the cylinder axis direction

No.178-033

The V-width is adjustable to the cylinder diameter facilitating axial measurement of a wide range of cylinder diameters.

- Adjustable range: $\phi 20^{\circ} \sim \phi 5.91^{\circ}$ ($\phi 5 \sim \phi 150\text{mm}$)



Setting attachment: Magnetic slider type

No.178-034

The magnet attached to the frame bottom surface allows taking hands-free measurement on the wall.



Setting attachment: Inside diameter type

No.178-035

Greatly facilitates measurement of internal wall surfaces of, for example, a cylinder block.

- Applicable diameter: $\phi 2.95^{\circ} \sim \phi 3.74^{\circ}$ ($\phi 75 \sim \phi 95\text{mm}$)
- Accessible depth: $1.18^{\circ} \sim 5.31^{\circ}$ ($30 \sim 135\text{mm}$)



Optional Accessories: Printers

SJ-Printer

(Optional accessory dedicated to SJ-201 series)

Printing recorded profiles is possible if the tester is connected to the dedicated hand-held, built-in battery operated compact SJ-printer (optional).

- Can be operated with two-way power supply (AC adapter/battery pack)
- Printing items: Measurement conditions, calculation results, surface profiles, bearing area curve (BAC)

- SJ Printer (with connection cable and 20 rolls of printer paper)


No. **178-420***

*To denote your AC line voltage add the following suffixes (e.g. 178-420A).

-A for 120V, D for 220V, E for 240V

- Printer paper (dedicated to this printer): 20 rolls


No. **12AAC243**

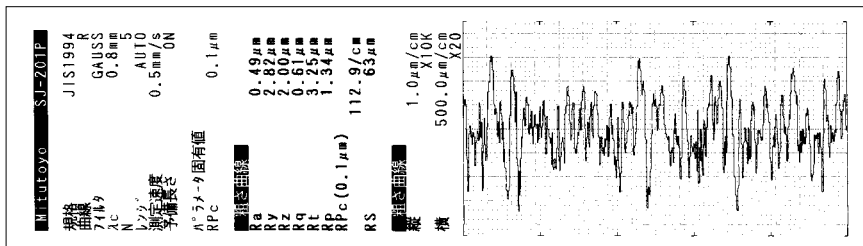

Sample of print format

- External view

Unit: Inch (Metric)

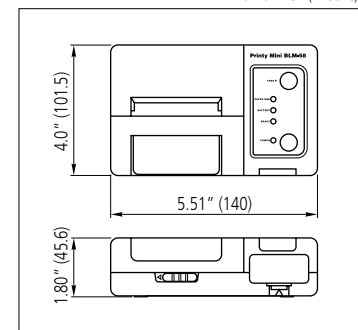

DP-1VR

Powerful data management capabilities make it possible to process the Digimatic data output from the SurfTest SJ series for measurement data printout, various statistical analyses for plotting a histogram and D-chart, and calculation of \bar{X} -R control charts. Also, it is equipped with the RS-232C GO/NG judgment output for connection to a personal computer.

- Digimatic mini-processor DP-1VR

No. **264-504***

*To denote your AC line voltage add the following suffixes (e.g. 264-504-5A).

-5A for 120V, -5D for 220V (for Europe), -5E for 240V (for UK),

-1K for Korea without AC adapter, -5F for 240V (for Oceania)

*A Digimatic Connecting Cable is required to use DP-1VR

- Digimatic connecting cable

Cable length 39.40" (1m): No. **936937**

Cable length 78.80" (2m): No. **965014**



Optional Software: SURFPAK-SJ

Surface roughness analysis program SURFPAK-SJ

An upgraded data analysis system can be built by connecting the SurfTest SJ series to a personal computer.

- Capable of diversified analyses of surface textures, including calculations of varieties of parameters and graphical data analyses.
- Equipped with a flexible report generating function that allows freely laying out the recorded profiles and the calculation results in the report.

An RS-232C cable is also required.

- SJ-201 series RS-232C cable No. **12AAA208**
- SJ-301 series RS-232C cable *1 No. **12AAA882**


*1: Equivalent to RS-232C straight cable with D-sub 9-pin female connector.



Assessed profile window:
The size of the assessed profile display can be easily changed.

Measurement result window:
Provides a great variety of parameters conforming to most of the world's standards.


Measuring condition setting window

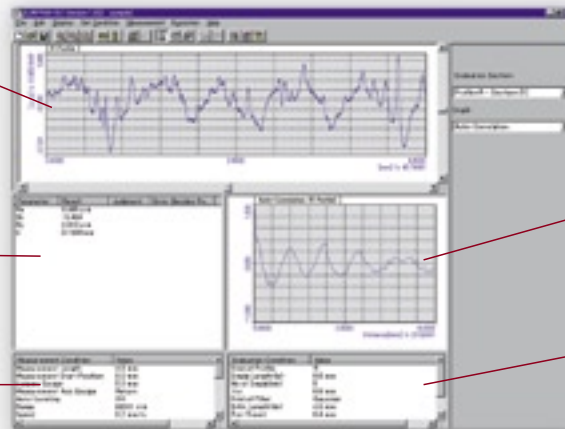

Analysis graph window:
Various analysis graphs can be created.

Evaluation conditions window:
For various recalculations of the measured data.


Operation window

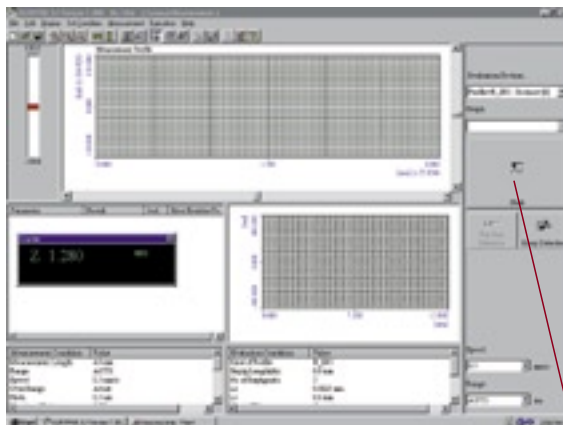

Measuring conditions setting window



Machine operation icons for SJ-201/301/401

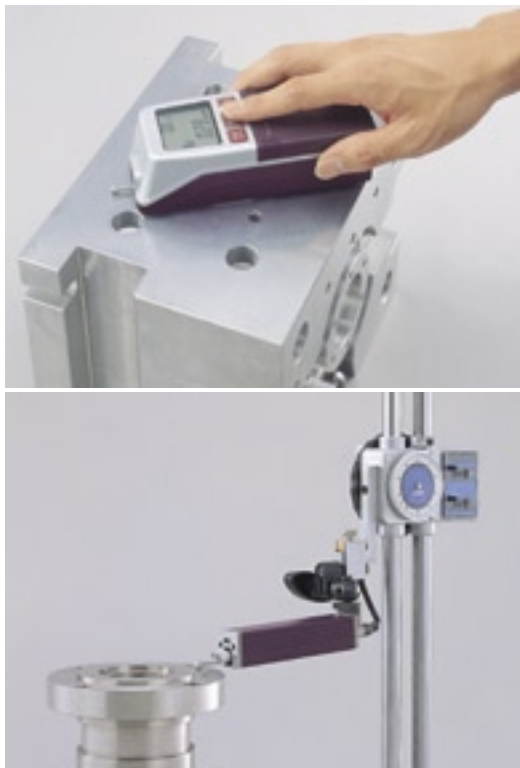

Specifications are subject to change without notice.

Note: All our product details, in particular the illustrations, drawings, dimensional and performance details and other technical specifications contained in this publication are to be considered to be approximate average values. To this extent, we reserve the right to make changes in design, technical data, dimensions and weight. Our specified standards, similar technical rules and technical specifications, descriptions and illustrations of the products are correct at the time of printing. The current version of our general terms and conditions also apply. Only offers which we have submitted can be considered to be definitive.

- Coordinate Measuring Machines
- Vision Measuring Systems
- Form Measurement
- Optical Measuring
- Sensor Systems
- Testing Equipment and Seismometer
- Digital Scale and DRO Systems
- Small Tool Instruments and Data Management

Mitutoyo America Corporation

www.mitutoyo.com

M³ Solution Center

Michigan
(734) 459-2810

Massachusetts
(978) 692-8765

Illinois
(630) 978-5385

No. Carolina
(704) 875-8332

California
(626) 961-9661

Ohio
(513) 754-0709

Mitutoyo

Precision is our Profession